



TECHNICAL SPECIFICATIONS




PRODUCT

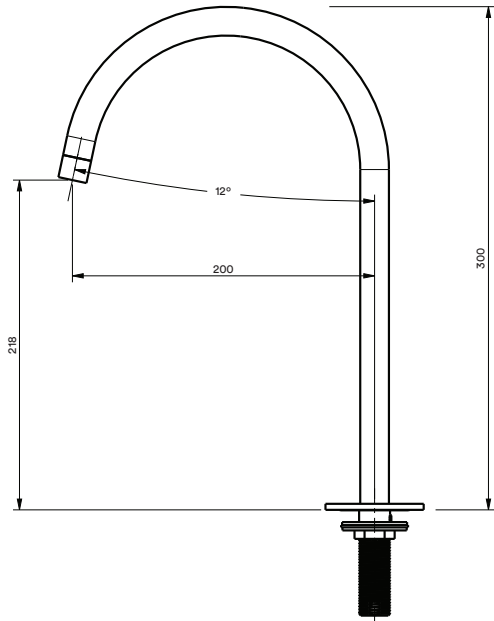

DETAILED ASSEMBLY



No	Description	Qty	Material
1	Aerator	1	ABS
2	Spout	1	SUS-316
3	Wear Resisting Ring	1	POM
4	Gasket	2	POM
5	O-Ring	2	NBR
6	O-Ring	1	SIS-316
7	Base	1	SUS-316
8	O-Ring	1	NBR
9	Screw	1	SUS-304
10	Rubber Gasket	1	NBR
11	SS Gasket	1	SUS-304
12	Lock Nut	1	SUS-304
13	Shank	1	SUS-316

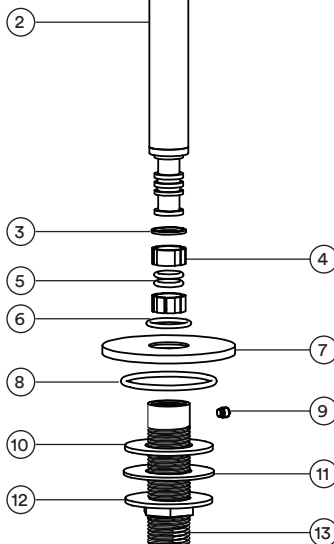

FEATURES

- 15 year warranty.
- 316 stainless steel.
- Does swivel.
- Flexihose sold separately.
- Flow rate:
 - SPO-SS-BAS003 - 5 Litres per minute @ 3 bar pressure.
 - SPO-SS-BAT003 - 20 Litres per minute @ 3 bar pressure.
 - SPO-SS-KIT003 - 9 Litres per minute @ 3 bar pressure.



WARRANTY

Refer to joansa.co.za for warranty terms & conditions.

CARE

Preparation:

Apply copper slip lubricant to prevent seizing of threaded fasteners.

Cleaning:

- Remove dirt using clean water and a soft cotton cloth.
- Clean the stainless steel surface with:
 - Gentle liquid detergent.
 - Colourless glass cleaner.
 - Non-abrasive polishes.
- Dry and remove all cleaning material with a soft cotton cloth.

Joan
Stainless Steel
with a conscience

+27 (021) 510 0489
30 Royal Road, Maitland,
Cape Town. 7405. South Africa

STEEL
SPO - SS - 003
Deck Mounted Spout - 200mm for Basin, Bath or Kitchen